


Light On! DynoLight™

USER MANUAL

- This Light On! Dynolight system is a Dynamo powered LED lighthouse with Crown mount.
- The Light On! Dynolight maximum output is 450 lumens @ 20 mph (400 lumens @ 14 mph). Two settings, low and high. Low is 250 lumens and high is 450 lumens
- Compatible with all 6 volt, 3 watt Dynamos.
- The DynoLight is not intended for use with batteries.
- Stand light operates at partial brightness for several minutes after you stop moving.
- For Dynamo power connection instructions please refer to the dynamo manufacturer's technical guide. Connect both AC wires to the dynamo. Do not ground to frame.
- For Light On! Tail Light connection, connect the Light On! Tail Light to the DC connector (red band around wire). **WARNING the Light On! DynoLight is only compatible with the Light On! Tail Light.**
- Although the DynoLight is highly water resistant, do not clean with a spray hose. Clean the lens with soapy water and a soft tooth brush. Rinse gently with water.
- Never look directly into this high power light. Never shine this light directly into anyone's eyes. Be courteous in the proximity of others.
- Dimensions: 1 inch tall, 1-1/2 inch long, 115 grams total mounted weight with bracket and cords.
- Handlebar, Axle, or Rack mounting brackets may be purchased separately.

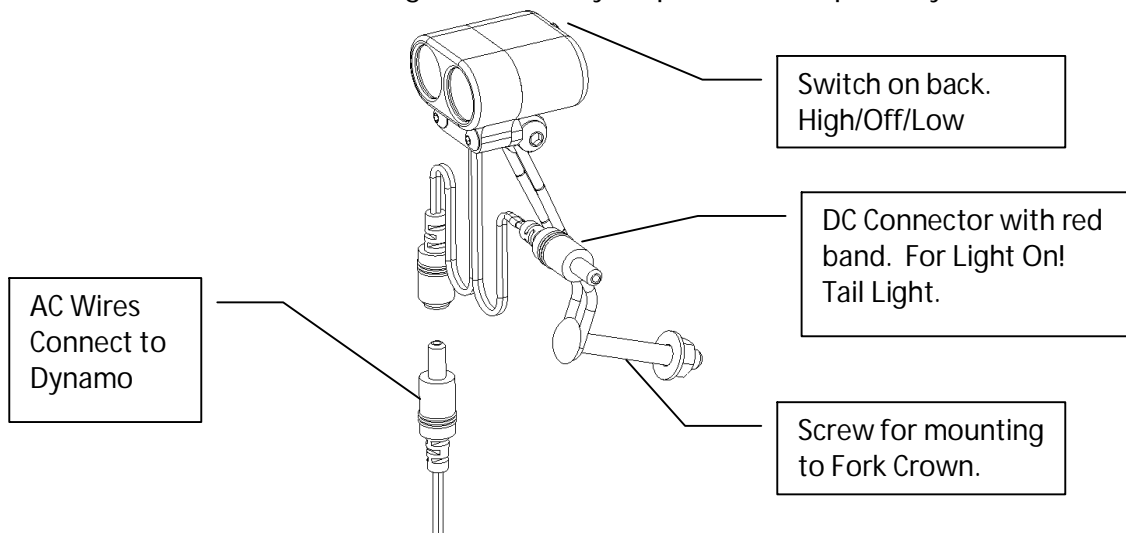

Warranty

Light On! LLC provides a two year limited warranty on all components. If a problem occurs in normal use and no alterations or abuse to the product have been determined to have taken place, we will repair or replace that component. Please contact LIGHT ON! LLC for return authorization. You will need to provide contact information, date of purchase, and description of issue.

Light On! LLC
20624 SW Cooper Ridge, Beaverton OR 97007
1-877-480-3456
www.lightonlights.com